



553055

(43) International Publication Date  
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number  
WO 2005/048593 A1(51) International Patent Classification<sup>7</sup>:

H04N 5/50

[KR/KR]; 376 Seohoong-ri, Bookpyung-myun, Haenam-goon, Jeonrabook-do 595-862 (KR).

(21) International Application Number:

PCT/KR2004/002824

(74) Agent: HAW, Yong-Noke; 8th Fl. Songchon Bldg., 642-15, Yoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(22) International Filing Date:

4 November 2004 (04.11.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language:

Korean

(26) Publication Language:

English

(30) Priority Data:

10-2003-0079690

12 November 2003 (12.11.2003) KR

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): LG INNOTEK CO.,LTD [KR/KR]; 14th Fl. Hansol Bldg., 736-1, Yoksam-dong, Kangnam-gu, Seoul 135-983 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LIM, Hyun-Woo

*[Continued on next page]*

(54) Title: DIGITAL TUNER

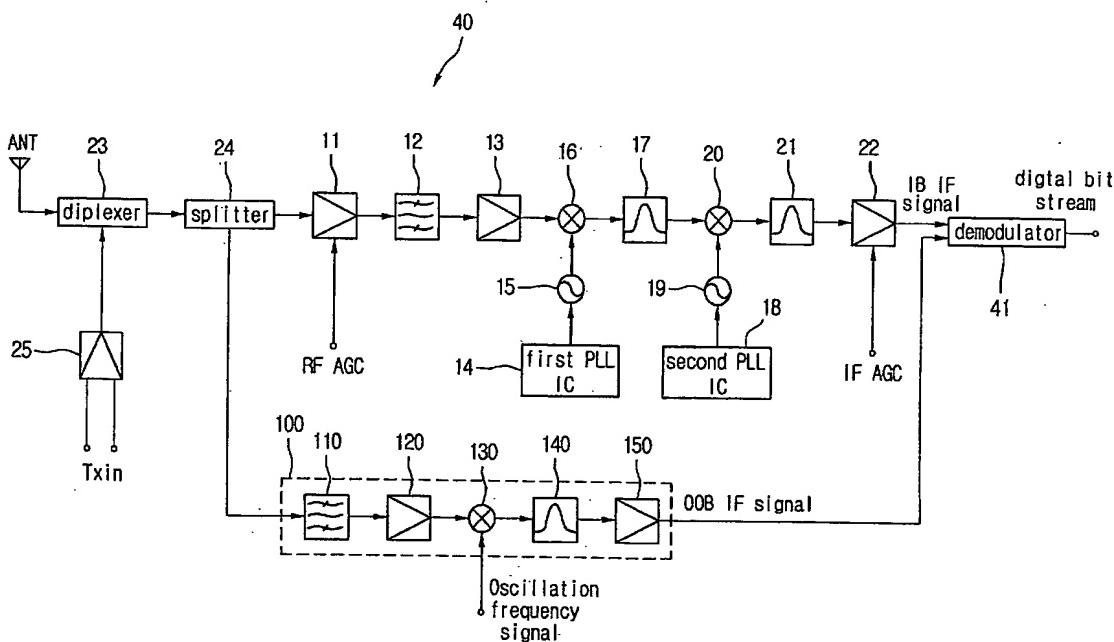

WO 2005/048593 A1

(57) Abstract: A digital tuner of a digital broadcast receiver provided. The digital tuner includes: an IB IF unit for converting an IB signal of the RF signal output into an ID IF signal; an OOB IF unit for converting an OOB signal of the RF signal output into an OOB IF signal. The IB signal and the OOB signal are simultaneously converted into IF signals prior to detection, whereby a digital broadcast signal can be smoothly received.